

FORGED IN AUSTRALIA'S TOUGHEST TERRAINS

OKA Gen-5 all-terrain vehicle is an open platform designed for extreme off-road applications across mining, defence, emergency services, and expedition use.

OKA vehicles deliver unparalleled capability through proven Australian engineering, purpose-built tough construction, and adaptable modular design. OKA represents 40 years of refinement in all-terrain capability development, with the latest Gen-5 OKA scaled for global deployment.

OKA is the only Australian vehicle with Type Approval under RVSA, a rare validation earned through engineering excellence and tested in Australia's harshest environments.

FEATURE HIGHLIGHTS

- Forward-control dual cab with high payload capacity
- Exceptional off-road performance with OKA Flex suspension
- Engineered to Australian ROPS safety standards
- High-strength welded ladder frame chassis

- Modular tray and seating configurations
- ► 6.7L Cummins turbo-diesel drivetrain
- ► Allison automatic transmission
- ➤ All-terrain tyres and high clearance for remote access
- ► Braked trailer towing up to 4,500 kg





Gen-5 Single Cab Specifications

STANDARD EQUIPMENT

ROPS-compliant 4-door steel cab (AS1636-1984)

Cummins 6.7L turbo-diesel, Euro 5

Low Range transfer case

Air-hydraulic brakes with vented discs

Power steering with damper

OKA Flex multi-leaf suspension

285/70R 19.5 Continental tyres with spare

Laminated windscreen, sliding windows

Full instrumentation

Allison 6-speed automatic transmission

OPTIONAL EQUIPMENT

Bull bar, tow bar, 25,000 lb winch

Front/rear differential locks

Dropside or custom tray bodies

Auxiliary tanks (170L fuel, 95L water)

Central tyre inflation system (CTIS)

Light bars, spotlights, beacons

NATO hitch and blackout lighting

SPECIFICATIONS

Physical Dimensions

Length: 5,648 mm

Width: 2,000 mm

Height: 2,508 mm

WADING DEPTH

Wheelbase: 3,190 mm

Frame Height: 950 mm

Weight & Capacity

GVM: 7,995 kg

Payload: 4,395 kg

GCM: 11,000 kg

Towing (braked trailer): 4,500 kg

Range: 1,600 km

Performance


Engine Power: 222kw / 285 hp

Torque: 1,025 Nm

Max Speed: 120 km/h

Turning Circle: 14.5 m


Max Gradient: 60%

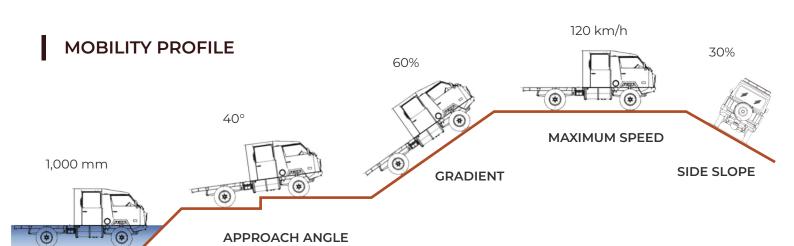

CONTACT INFORMATION

OKA GEN-5 SERIES SINGLE CAB


EURO 5 | TECHNICAL DATA SHEET

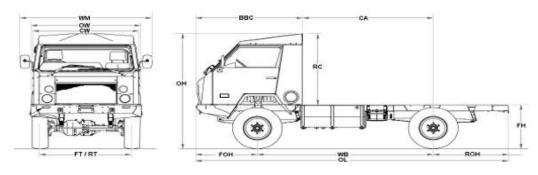

Dimensions mm							
OL Overall Length	OH Overall Height	OW Overall Width	CW Cab Width	WM Width Mirrors	FT Front Track	RT Rear Track	
5648	2508	2000	1900	2340	1664	1664	
WB Wheelbase	FOH Front O'hang	ROH Rear O'hang	BBC Cab Length	CA Cab to R Axle	FH Frame Height	TL Tray Length	
3190	1101	1357	1917	2374	950	3685	

OKA GEN-5 DUAL CAB


EURO 5 | TECHNICAL DATA SHEET

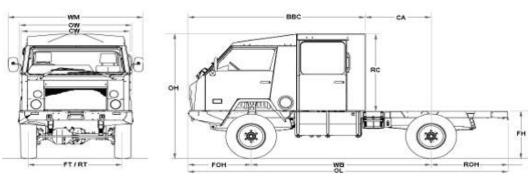

Dimensions mm						
OL Overall Length	OH Overall Height	OW Overall Width	CW Cab Width	WM Width Mirrors	FT Front Track	RT Rear Track
5648	2508	2000	1900	2340	1664	1664
WB Wheelbase	FOH Front O'hang	ROH Rear O'hang	BBC Cab Length	CA Cab to R Axle	FH Frame Height	RC Rear of Cab
3190	1101	1357	3124	1167	950	1558

OKA GEN-5 MULTI CAB


EURO 5 | TECHNICAL DATA SHEET

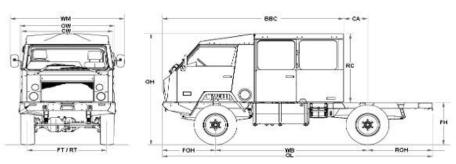


Dimensions mm						
OL Overall Length	OH Overall Height	OW Overall Width	CW Cab Width	WM Width Mirrors	FT Front Track	RT Rear Track
5648	2508	2000	1900	2340	1664	1664
WB Wheelbase	FOH Front O'hang	ROH Rear O'hang	BBC Cab Length	CA Cab to R Axle	FH Frame Height	RC Rear of Cab
3190	1101	1357	3800	491	950	1558

OKA GEN-5 DUAL CAB

EURO 5 | SEATING




Standard – 6 seats (2+4) in module




Standard - 5 seats (2+3) in module

OKA GEN-5 MULTI CAB


EURO 5 | SEATING



Standard – 9 seats (2 + 7) in module




Standard – 8 seats (2+6) in module



Standard – 8 seats (2+6) in module

OKA GEN-5 MULTI VAN

EURO 5 | SEATING




Standard - 8 seats (2+6) in module



Standard - 9 seats (2+7) in module

OKA GEN-5 MINE SPEC BUS

EURO 5 | SEATING

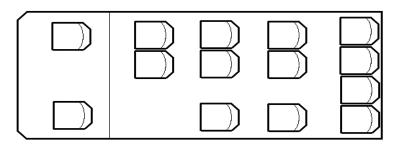

Standard - 14 seats (2+12) in module